

Product datasheet:

Complete EMC conduit connectors nickel-plated brass

EMC conduit gland for metal conduit SPR / FLEXAgraff

- Conduit gland US-M
- for FLEXAgraff-CU-AS / SPR-EDU-AS
- with brass thrust collar
- 1 = For SPR-EDU-AS
- The reliability is only guaranteed with the corresponding stabilizing bush



Article number:  **5011.340.025**

EAN: 7611614119113

Packaging quantity: 25

Dimensions / Form

Thread:	M25x1.5
Spanner size:	34/36 mm
Ø B:	39 mm
Ø I:	21.0 mm
Measurement value C:	11 mm
Measurement value D:	41 mm

Features

Properties: Highly watertight and dustproof, friction locking of conduit and gland, proper earthing, covered conduit ends, resistant to stretch and vibrations

Thread type: metric


Approvals / Certifications

Protection class: IP40

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 250 °C

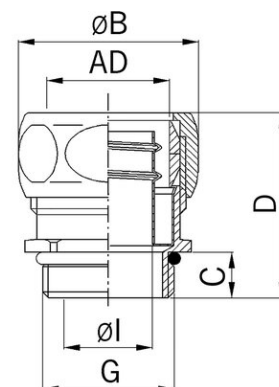

**UK
CA**