

Product datasheet:

Complete EMC conduit connectors nickel-plated brass

EMC conduit gland for metal conduit SPR / FLEXAgraff

- Conduit gland US-P
- for FLEXAgraff-CU-AS / SPR-EDU-AS
- with brass thrust collar
- 1 = For SPR-EDU-AS
- The reliability is only guaranteed with the corresponding stabilizing bush



Article number: **5011.128.021**

EAN: 7611614213224

Packaging quantity: 25

Dimensions / Form

Thread: Pg 21


Spanner size: 34/36 mm

Ø B: 39 mm

Ø I: 20.5 mm

Measurement value C: 10 mm

Measurement value D: 40 mm

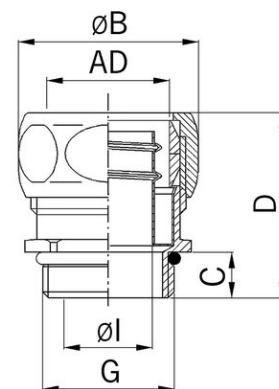

Connections / Entries

Number of entries: 1

Features

Properties: Highly watertight and dustproof, friction locking of conduit and gland, proper earthing, covered conduit ends, resistant to stretch and vibrations

Thread type: Pg

**UK
CA**

Approvals / Certifications

Protection class: IP40

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 250 °C