

Product datasheet:

Complete EMC conduit connectors nickel-plated brass

EMC conduit gland for metal conduit SPR / FLEXAgraff

- Conduit gland USD-M
- for FLEXAgraff-CU-PU-AS
- with brass thrust collar
- The reliability is only guaranteed with the corresponding stabilizing bush



Article number:	5015.328.032
EAN:	7611614153438
Packaging quantity:	25

Dimensions / Form

Thread:	M32x1.5
Spanner size:	43/45 mm
Ø B:	48 mm
Ø I:	27.5 mm
Measurement value C:	10 mm
Measurement value D:	44 mm

Features

Properties:	Highly watertight and dustproof, friction locking of conduit and gland, proper earthing, covered conduit ends, resistant to stretch and vibrations
-------------	--


Thread type:	metric
--------------	--------

Approvals / Certifications

Protection class:	IP67
-------------------	------

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	125 °C

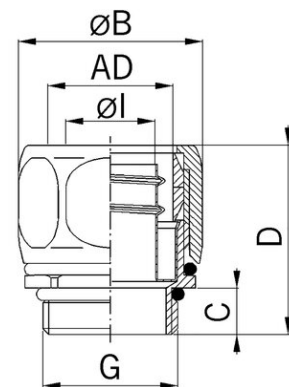

**UK
CA**