

Product datasheet:

Complete EMC conduit connectors nickel-plated brass

EMC conduit gland for metal conduit SPR / FLEXAgraff

- Conduit gland US-P
- AIRflex-KUW-EDU
- with brass thrust collar
- The reliability is only guaranteed with the corresponding stabilizing bush



Article number: **5011.135.013**

EAN: 7611614238913

Packaging quantity: 50

Dimensions / Form

Thread: Pg 13

Spanner size: 25/27 mm

Ø B: 29 mm

Ø I: 13.0 mm

Measurement value C: 7 mm

Measurement value D: 30 mm

Features

Properties: Highly watertight and dustproof, friction locking of conduit and gland, covered conduit ends, resistant to stretch and vibrations

Thread type: Pg


Approvals / Certifications

Protection class: IP54

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 125 °C

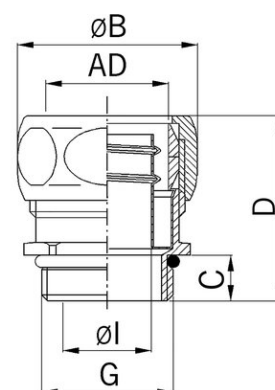

**UK
CA**