

Product datasheet:

Complete EMC conduit connectors nickel-plated brass

EMC conduit gland for metal conduit SPR / FLEXAgraff

- Conduit gland US-P
- AIRflex-KUW-EDU
- with brass thrust collar
- The reliability is only guaranteed with the corresponding stabilizing bush



Article number: **5011.135.016**

EAN: 7611614238944

Packaging quantity: 50

Dimensions / Form

Thread:	Pg 16
Spanner size:	27/29 mm
Ø B:	31 mm
Ø I:	14.5 mm
Measurement value C:	7 mm
Measurement value D:	30 mm

Features

Properties: Highly watertight and dustproof, friction locking of conduit and gland, covered conduit ends, resistant to stretch and vibrations

Thread type: Pg


Approvals / Certifications

Protection class: IP54

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 125 °C

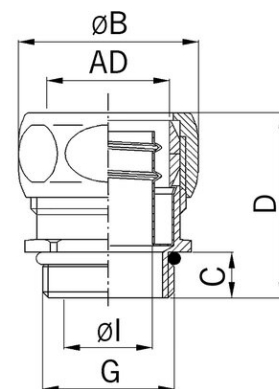

**UK
CA**