

Product datasheet:

Cable glands AGRO ECO HL3 according to EN 45545-2/3 and NFPA 130 quickly assembled

Short entry thread metric

· One-piece sealing ring

Material: Nickel-plated brass

Seal: TPE with railway approval

Support ring: Polyamide PA6

O-ring: NBR

Contact spring: Stainless spring steel 1.4310

Strain relief: Version A according to EN 62444


Water jets: IP66

Water pressure: IP68, 10 bar / 30 min

High-pressure water: IP69, IP69K

Dust protection: IP6X

Operating temperature: -50 °C to +105 °C

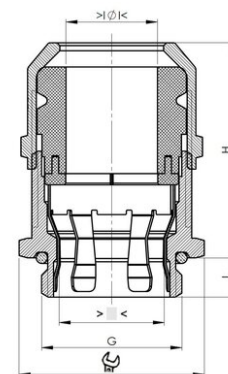

Article number: **⇒ F1088.40.255**

EAN: 7611614512716

Packaging quantity: 10

Dimensions / Form

Thread: M40x1.5

Spanner size: 46 mm

Dimension H: 49,5 mm

Thread length L: 8 mm

Connections / Entries

Min. clamping range: 20.5 mm

Max. clamping range: 25.5 mm

Max. shield braiding: 22.5 mm

Shield braid min.: 17.5 mm

clamp technology: Compression technology



Assembly instructions

Features

Thread type: metric

Thread length: short

Approvals / Certifications

Protection class: IP68

Protection class with condition: IP 68 / IP 69K with additional seal

Storage / Installation / Operation

Minimum operating temperature: -50 °C

Maximum operating temperature: 105 °C