

Product datasheet:


Telescope equipment carrier

Telescope equipment carrier and switch box

- for secure installation of luminaires and much more
- for use with external insulation of walls and ceilings
- installation area for dowel-free installation of accessories

Telescope equipment carrier for mechanically secure and thermal bridge-free installation in insulated exterior walls, telescope equipment carrier made of plastic, thermal bridge-free design in accordance with DIN 18015-5, for installation in insulated exterior walls, mounting surface 120x120 mm for accessories, weight load for wall or ceiling mounting 50 N (5 kg), insulation thickness adjustable 80-200 mm, with dimension specifications marked on carrier arm, flame-retardant according to DIN EN 60695 up to 650° C, halogen-free in accordance with DIN VDE 0604-2-100, for installation in insulated facades, for 20 mm conduits and NYM cables (3 x 1.5 mm², 5 x 1.5 mm² or 3 x 2.5 mm², 5 x 2.5 mm² or 5 x 7.5 mm², low voltage)

Device mounting with self-tapping screws, diameter 3.2 - 4 mm

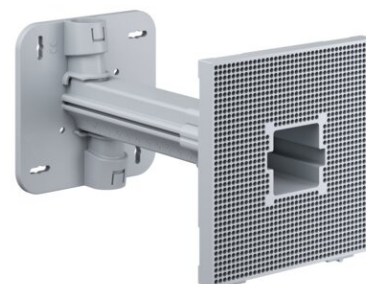

Article number:  **1159-60**

EAN: 4013456537040

Packaging quantity: 10

Price group: 180

Dimensions / Form

Product length: 120 mm

Product width: 120 mm

Attachment surface for devices, max. length: 120 mm

Attachment surface for devices Width max.: 120 mm

Connections / Entries

For conduit Ø: 20 mm

Assembly / Installation

Min. insulation thickness: 80 mm

Insulation thickness max.: 200 mm

Assembly type: ETICS/external insulation

Safety / Properties

Halogen-free: Yes

Mechanical load bearing wall: 5 kg

Mechanical load bearing capacity ceiling: 5 kg

For the safe installation of luminaires, motion detectors and many other accessories in and on insulated facades. Optimised for the latest insulation thicknesses, the telescopic products permit a wide range of applications in external faces with insulation thicknesses from 80 to 200 mm. The two conduit entries on the basic carrier guarantee secure conduit connection. The cable routing which is integrated in the carrier arm ensures a fast, easy cable pull-in.



Assembly instructions



Certificates



Planning data

Product datasheet:

- Stable fit to walls and ceilings
- For insulation thicknesses from 80 to 200 mm
- Equipment carriers for accessories up to max. 5 kg
- One-gang boxes can be combined with a standardised 71 mm combination distance
- Conduit entries on the carrier with internal cable routing
- Integrated indicated dimension allows easy cutting off to insulation thickness
- Front fixing and depth stop prevent incorrect installation
- Front fixing of the mounting plate/one-gang box