


Product datasheet:

Combination one-gang box

Telescope equipment carrier and switch box

· for combinations with telescope switch box (Art. No. 1159-61)

Telescope switch box for mechanically secure and thermal bridge-free installation in insulated exterior walls, telescopic combination one-gang box made of plastic, thermal bridge-free design in accordance with DIN 18015-5, for installation in insulated exterior walls, one-gang box dimensions (L x W x D) 68 x 70 x 50 mm with break-out side walls for connection to telescope switch boxes (1159-61), flame-retardant in accordance with DIN EN 60695 up to 650°C, halogen-free in accordance with DIN VDE 0604-2-100, for installation in insulated facades, with 2 screw domes

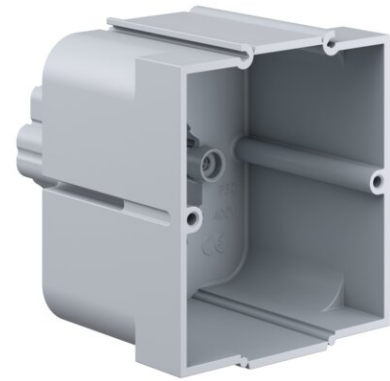

Article number:	1159-62
EAN:	4013456537064
Packaging quantity:	10
Price group:	180

Dimensions / Form

Product length:	68 mm
Product width:	70 mm
Product depth:	50 mm

Connections / Entries

Number of entries:	2
For conduit Ø:	16 mm

Assembly / Installation

Assembly type:	ETICS/external insulation
----------------	---------------------------

Safety / Properties

Halogen-free:	Yes
---------------	-----



Assembly instructions



Certificates



Planning data

For the safe installation of luminaires, motion detectors and many other accessories in and on insulated facades. Optimised for the latest insulation thicknesses, the telescopic products permit a wide range of applications in external faces with insulation thicknesses from 80 to 200 mm. The two conduit entries on the basic carrier guarantee secure conduit connection. The cable routing which is integrated in the carrier arm ensures a fast, easy cable pull-in.

- Stable fit to walls and ceilings
- For insulation thicknesses from 80 to 200 mm
- Equipment carriers for accessories up to max. 5 kg
- One-gang boxes can be combined with a standardised 71 mm combination distance
- Conduit entries on the carrier with internal cable routing
- Integrated indicated dimension allows easy cutting off to insulation thickness
- Front fixing and depth stop prevent incorrect installation
- Front fixing of the mounting plate/one-gang box