

Productgegevensblad:

Inbouwdoos voor inbouw in bekisting

Flush-mounted junction boxes for flexible plastic conduits (KRF or KRFG)


· voor hout- en staalbekisting in stortbeton en inbouw in metselwerk

Concrete construction, junction casing, 175 x 120 x 64 mm, 2-piece
Junction casing for concrete construction installation, on-site mixed concrete, fixing to formwork

Concrete construction box, designed as a concrete construction formwork box, made of plastic, with internal cover as adhesive attachment surface, with four steel nails and predetermined breaking points for nail removal, with four slotted holes for cover fastening

Length 175 mm, width 120 mm, depth 64 mm

Combination entries with break-out openings for electrical installation conduits (14 x 20/25 mm and 4 x 20/25/32 mm), break-out openings for electrical installation conduits (2 x 20 mm), protection class IP 30 according to DIN EN 60529, flame-retardant according to DIN EN 60695 up to 650° C, halogen-free according to DIN VDE 0604-2-100, for concrete construction installation in on-site mixed concrete

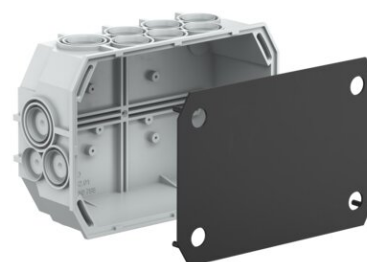

Artikelnummer: 9912.01

EAN: 7611614037639

Verpakkingshoeveelheid: 5

Afmetingen / Vorm

Productlengte: 175 mm

Productbreedte: 120 mm

Productdiepte: 64 mm

Aansluitingen / Invoeringen

Voor buis Ø: 32 mm

Montage / Installatie

Montagetype: BB (massieve constructie)

Veiligheid / Eigenschappen

Speciale toepassing: Stortbeton

Each flush-mounted junction box has a large number of break-out conduit inlets. They are equally suitable for use with flexible plastic conduits of the corrugated (KRFG) or the smooth (KRF) type. The electrician can easily and quickly insert the conduits into the box or pull them through.



Certificaten



Planningsgegevens