

Productgegevensblad:

Inbouwdoos voor inbouw in bekisting

Flush-mounted junction boxes for flexible plastic conduits (KRF or KRFG)


· voor hout- en staalbekisting in stortbeton en inbouw in metselwerk

concrete construction, junction casing, 170 x 115 x 95 mm, 2-piece
Junction casing for concrete construction installation, on-site mixed concrete, fixing to formwork

Concrete construction box, designed as a concrete wire-pull casing, made of plastic, with internal cover as adhesive attachment surface, with four steel nails and predetermined breaking points for nail removal, with four slotted domes for cover fastening

Length 170 mm, width 115 mm, depth 95 mm

Combination entries with break-out openings for electrical installation conduits (14 x 20/25 mm and 6 x 20/25 mm/32), break-out openings for electrical installation conduits (2 x 20 mm), protection class IP 30 according to DIN EN 60529, flame-retardant according to DIN EN 60695 up to 650° C, halogen-free according to DIN VDE 0604-2-100, for concrete construction installation in on-site mixed concrete

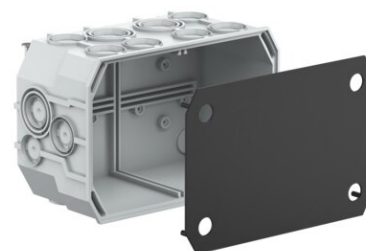

Artikelnummer: 9911.01

EAN: 7611614037578

Verpakkingshoeveelheid: 5

Afmetingen / Vorm

Productlengte: 170 mm

Productbreedte: 115 mm

Productdiepte: 95 mm

Aansluitingen / Invoeringen

Voor buis Ø: 32 mm

Montage / Installatie

Montagetype: BB (massieve constructie)

Veiligheid / Eigenschappen

Speciale toepassing: Stortbeton

Each flush-mounted junction box has a large number of break-out conduit inlets. They are equally suitable for use with flexible plastic conduits of the corrugated (KRFG) or the smooth (KRF) type. The electrician can easily and quickly insert the conduits into the box or pull them through.



Certificaten



Planningsgegevens