

Product datasheet:

B¹ 35 mm diameter ceiling junction box

B¹ ceiling junction box

- Rear part of box with holder for light hooks according to DIN EN 60670 (50 N)
- 2-piece with moulded rear part
- Suitable for all types of formwork
- Usable light hooks:
- 100 mm / Art. No. 1225-10
- 120 mm / Art. No. 1225-12
- 140 mm / Art. No. 1225-14


concrete construction, B¹ Ceiling junction box, 2-part, installation opening Ø 35 mm, depth 95 mm, with light hook slot

Ceiling junction box for concrete construction installation, on-site mixed concrete, fixing to formwork

Concrete construction box, designed as a concrete construction ceiling junction box in accordance with DIN EN 60670/VDE 0606 and DIN 49073, made of plastic

Exit opening Ø 35 mm, length 94 mm, width 75 mm, depth 95 mm, with slot for light hooks according to DIN EN 60670 (50N), front part can be swung out with signal bristle, with 4 screw domes, without device screws

Combination entries with break-out openings for electrical installation conduits (7 x 20/25 mm) and entry markings for cables and electric cables (7 markings up to Ø 16 mm), protection class IP 30 according to DIN EN 60529, flame-retardant according to DIN EN 60695 up to 650° C, halogen-free according to DIN VDE 0604-2-100, for concrete construction installation on-site mixed concrete

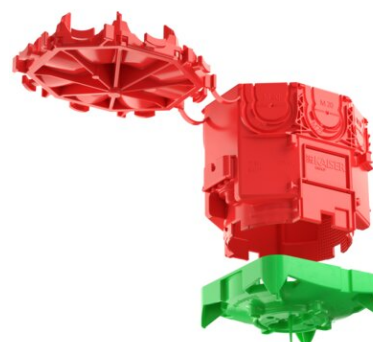

Assembly instructions



Technical information



Planning data

Article number:  **1265-12**

EAN: 4013456550568

Inner packing / Packaging quantity: 20 / 100

Price group: 130

Dimensions / Form

Product length: 94 mm

Product width: 75 mm

Product depth: 95 mm

Cover for box/housing/casing Ø: 35 mm

Connections / Entries

Number of entries: 7

For conduit Ø: 25 mm

Wire entry Ø max.: 16 mm

Assembly / Installation

Assembly type: BB (solid construction)

Safety / Properties

Special application: on-site mixed concrete

Approvals / Certifications

VDE: Yes

Product datasheet:

The new B¹ ceiling boxes simplify installation on the ceiling formwork. The innovative conduit entries enable conduits to be easily inserted into several ceiling boxes arranged in a row without having to cut them during the laying work. Due to the conduit entries located higher up, additional cut-outs of the reinforcement bars are unnecessary, ensuring fast insertion of the empty conduits on the ceiling.

- Suitable for all types of formwork
- Flat front part enables smooth insertion of the reinforcing bars on the ceiling formwork
- Innovative conduit entries for fast processing on the construction site
- Larger mounting and installation space
- Mounting of a light hook in accordance with DIN EN 60670
- The proven KAISER colour coding system ensures that the installation can be checked quickly