

Product datasheet:

CD100R Kitvast junction box with tape Ø 16/19 mm

Kitvast concrete system junction boxes

- Applicable in wide slab floors and on tunnel formwork.
- Distance from the bottom of the conduit entry to the open side of the box: 80 mm.
- The penetration of concrete water into conduit entries is prevented by adhesive tape.
- Fitted with adhesive lid.
- Suitable covers for mounting: Art. no. AT5010 and AT5011.



Article number:	⇒ AT1039
EAN:	8712259280301
Packaging quantity:	36

Dimensions / Form

Product Ø:	105 mm
Installation opening (wall/ceiling) Ø:	80 mm

Connections / Entries


Number of entries:	8
For conduit Ø:	19 mm

Assembly / Installation

Assembly type:	BB (solid construction)
----------------	-------------------------

Safety / Properties

Halogen-free:	Yes
Special application:	on-site mixed concrete

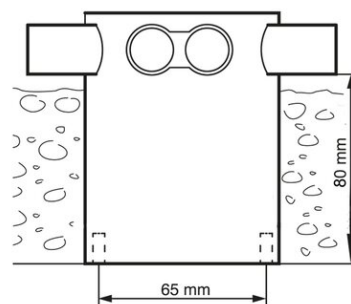

ETIM Product classification:

Box/housing for built-in mounting in the wall/ceiling

Mounting method:	Concrete building
Shape:	Round
Construction type:	Central conduit box
Model:	Single
Provided with revolving ring:	No
Couplable:	No
Equipped with:	
Diameter:	77 mm
Length:	
Width:	
Depth:	
Inner depth:	100 mm

Product datasheet:

Suitable for wall/board thickness:	
Suitable for number of device inserts:	0
Mounting switching equipment:	
With screws:	No
Number of non-adjustable device fixing lugs:	
Number of adjustable device fixing lugs:	
Housing feed-through by break-out opening:	No
Housing feed-through by seal membrane:	No
Housing feed-through by nozzle:	No
Housing feed-through by step membrane:	No
Suitable for tube diameter:	16/19 mm
Suitable for cable diameter:	
Pipe locking:	No
Pipe locking optional:	No
Inlet from the rear:	No
Number of inlets:	8
Number of included spouts:	0
Material:	Plastic
Halogen free:	No
Surface protection:	Untreated
Colour:	Grey
Degree of protection (IP):	IP20
Degree of protection (NEMA):	
Cover model:	Construction protective cover
Transparent cover:	No
Cover attachment:	Snapped on
Sealable:	No
Circuit integrity:	None
With screening:	No
Airtight:	No
Max. conductor cross section:	6 mm ²
Number of poles of the clamp:	0
Clamp position fixed:	No
Luminaire hook mounting:	No
Nozzle:	Tunnel branch pipe
Special application:	None
With partition panel:	
Compliant with BS 4662:	

Product datasheet:

Attema's Kitvast® concrete system is used in cement plants. After measurement, the box and cover are anchored in place with adhesive. After removal of the form, the cover and adhesive are removed from the form. The Kitvast® adhesive covers are designed in such a way that no adhesive residue is visible on the wall. Kitvast® is a flexible system that can be used on all surfaces without causing any damage to the form. Fixing by means of gluing (hot melt). Suitable for steel formwork. Fixing without drilling, i.e. no damage to formwork. Ideal for concrete plants.

- Attachment by means of gluing (hot melt).
- Suitable for steel formwork.
- Attachment without drilling, so no damage to formwork.
- Ideal for concrete factories.