


DATASHEET


AU-Multiple Termination Unit

Article numbers:

AT29211	AU-Single Termination Unit (+ 1 LC Duplex adapter)
AT29212	AU-Double Termination Unit (+ 2 LC Duplex adapters)
AT29213	AU-Triple Termination Unit (+3 LC Duplex adapters)
AT29214	AU-Fourfold Termination Unit (+ 4 LC Duplex adapters)
AT29216	AU-Sixfold Termination Unit (+ 6 LC Duplex adapters)
AT29218	AU-Eightfold Termination Unit (+ 8 LC Duplex adapters)

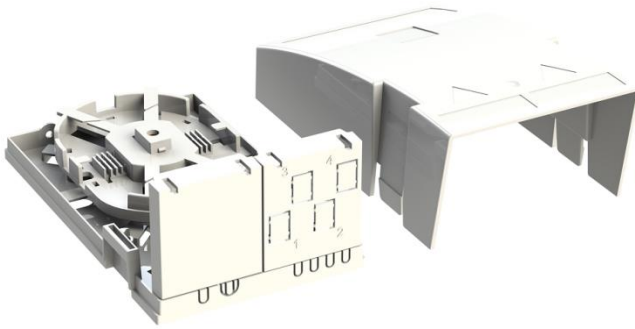

29211 – 29212 – 29213 - 29214

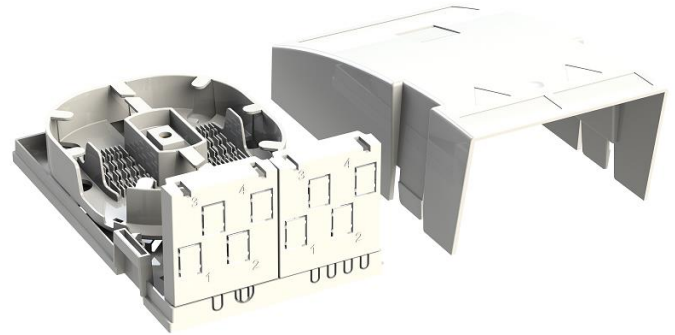

29216 – 29218

Product description

The Attema Universal Multiple Termination Unit is a compact fiber connection unit. It can be applied as a fiber connection point (HausÜbergabePunkt) for residential fiber installations. It provides mechanical protection, fiber management and is easy to install. The universal box has multiple adaptor ports and is suitable for most simplex adaptors like SC, LC (also duplex) and E2000. Additionally, there is a possibility to seal off the box in order to prevent unauthorized opening.

Features and Benefits

- Easy to install
- Orderly assembly sequence
- Universally applicable (for indoor use)
- Sealable
- Suitable for most adapters
- Suitable for splice protectors ANT and mini heatshrink
- Integrated cable retention

Technical characteristics

Material:	Molded Plastic, halogen-free
Dimensions Box :	H=160mm W=92mm D=60mm
Weight:	0,15 kg
Colour:	White (RAL 9010)
IP Class:	IP20
Drop cable / duct diameters:	Up to max Ø8mm
Number of ports in :	6 (1x Ø8mm, 1x Ø4,5mm en 4x Ø4mm)
Number of adapter ports:	
29211, 29212, 29213 & 29214	4
29216 & 29218	8
Splice tray capacity:	
29211, 29212, 29213 & 29214	8 splice protectors ANT/mini heatshrink
29216 & 29218	16 splice protectors ANT/mini heatshrink
Fiber bending radius:	R = 30mm
Looping length of fibers:	25 cm

Package consists of recyclable materials and is clearly labelled with the Attema article numbers.

END OF DATASHEET

www.attema.com