


Product datasheet:

OTO-AP FTTH, ready to splice with pre-assembled cable, 120m (Dca)

OTO-AP FTTH, surface-mounted, pre-terminated on one side

· 4x fibres, 4x LC/APC

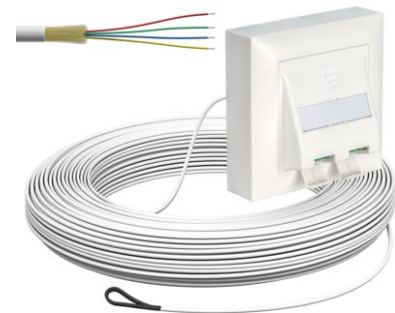

Article number: 8655.2.3.1200GE

E-No: 866700823

EAN: 7611614462684

Packaging quantity: 1

Dimensions / Form

Product length: 86 mm

Product width: 86 mm

Product depth: 20 mm



Safety / Properties

Halogen-free: Yes

Features

Fibre class: Single Mode OS2 (G.657.A2)

Fibre type: 4x 9/125 LowBand ITU G657.A

Cable/line length: 120 m

Number of fibres (max.): 4

Fibre colour coding: 1 = red, 2 = green, 3 = yellow, 4 = blue

Approvals / Certifications

BauPVo: Dca according to EN50575:2017 + A1:2016

Protection class: IP20

Classification connectivity: Dca

Storage / Installation / Operation

Minimum storage temperature: -10 °C

Maximum storage temperature: 60 °C

Minimum installation temperature: -10 °C

Installation temperature max.: 60 °C

Minimum operating temperature: -20 °C

Maximum operating temperature: 60 °C

The optical termination outlet will be the termination point of the optical fibre cable within the appartement / home. Due to the pre-assembled cable in 7-8 different cable lengths, this variant forms an optimal solution for structured cabling.