

Product datasheet:

Cable glands Progress® nickel-plated brass

Short entry thread metric

Approval type: Progress MS

- One-piece sealing insert
- overall length insulated
- 1 = Metric coarse-pitch thread (with VDE Testreport)
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number:	1060.25.125
E-No:	121077608
EAN:	7611614105277
Packaging quantity:	25

Dimensions / Form

Thread:	M25x1.5
Spanner size:	30 mm
Dimension H:	25 mm
Thread length L:	7 mm

Connections / Entries

Min. clamping range:	9.5 mm
Max. clamping range:	12.5 mm
Clamping range UL:	10.4 - 12.5 mm
clamp technology:	Compression technology

Features

Thread type:	metric
Thread length:	short

Material / Colour


Material:	Nickel-plated brass
-----------	---------------------

Approvals / Certifications

Protection class:	IP69
Protection class with condition:	IP 68 (10 bar) / IP69
VDE:	Yes

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	100 °C

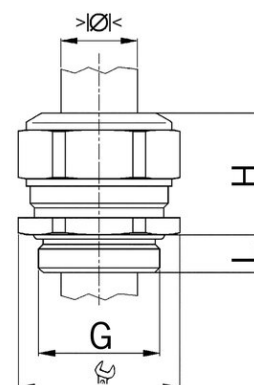

Product datasheet:



Assembly instructions



Certificates



Planning data