

## Product datasheet:

# Cable glands Progress® nickel-plated brass

## Short entry thread metric

### Approval type: Progress MS

- One-piece sealing insert
- overall length insulated
- 1 = Metric coarse-pitch thread (with VDE Testreport)
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



|                        |                    |
|------------------------|--------------------|
| <b>Article number:</b> | <b>1060.32.255</b> |
| E-No:                  | 121077718          |
| EAN:                   | 7611614105314      |
| Packaging quantity:    | 25                 |

### Dimensions / Form

|                  |         |
|------------------|---------|
| Thread:          | M32x1.5 |
| Spanner size:    | 36 mm   |
| Dimension H:     | 28 mm   |
| Thread length L: | 8 mm    |

### Connections / Entries

|                      |                        |
|----------------------|------------------------|
| Min. clamping range: | 21 mm                  |
| Max. clamping range: | 25.5 mm                |
| Clamping range UL:   | 22.2 - 25.5 mm         |
| clamp technology:    | Compression technology |

### Features

|                |        |
|----------------|--------|
| Thread type:   | metric |
| Thread length: | short  |

### Material / Colour


|           |                     |
|-----------|---------------------|
| Material: | Nickel-plated brass |
|-----------|---------------------|

### Approvals / Certifications

|                                  |                       |
|----------------------------------|-----------------------|
| Protection class:                | IP69                  |
| Protection class with condition: | IP 68 (10 bar) / IP69 |
| VDE:                             | Yes                   |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 100 °C |

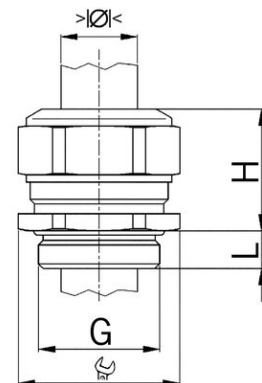

## Product datasheet:



Assembly instructions



Certificates



Planning data