

Product datasheet:

Cable glands Progress® nickel-plated brass

Short entry thread metric

Approval type: Progress MS

- One-piece sealing insert
- overall length insulated
- 1 = Metric coarse-pitch thread (with VDE Testreport)
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number: **1060.50.370**

EAN: 7611614105345

Packaging quantity: 10

Price group: 500

Dimensions / Form

Thread: M50x1.5

Spanner size: 55 mm

Dimension H: 34 mm

Thread length L: 9 mm

Connections / Entries

Min. clamping range: 33 mm

Max. clamping range: 37 mm

Clamping range UL: 34.3 - 37.2 mm

clamp technology: Compression technology

Features

Thread type: metric

Thread length: short

Material / Colour

Material: Nickel-plated brass

Approvals / Certifications

Protection class: IP69


Protection class with condition: IP 68 (10 bar) / IP69

VDE: Yes

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 100 °C

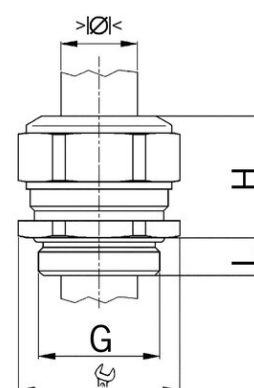

Product datasheet:



Assembly instructions



Certificates



Planning data