

Product datasheet:

Cable glands Progress® nickel-plated brass

Short entry thread metric

Approval type: Progress MS

- One-piece sealing insert
- not overall length insulated
- 1 = Metric coarse-pitch thread (with VDE Testreport)
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number: **1000.06.030**

EAN: 7611614104188

Packaging quantity: 50

Price group: 500

Dimensions / Form

Thread: M6x1.0

Spanner size: 8 mm

Dimension H: 12 mm

Thread length L: 5 mm

Connections / Entries

Min. clamping range: 2.5 mm

Max. clamping range: 3 mm

Clamping range UL: 3 mm

clamp technology: Compression technology

Features

Thread type: metric

Thread length: short

Approvals / Certifications


Protection class: IP69

Protection class with condition: IP 68 (10 bar) / IP69

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 100 °C

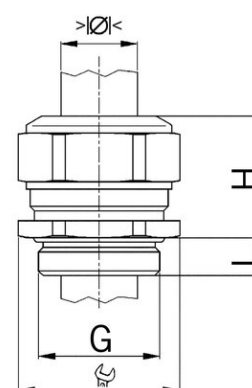

Assembly instructions



Certificates



Planning data