

Product datasheet:

Cable glands Progress® nickel-plated brass

Short entry thread metric

Approval type: Progress MS

- Two-piece sealing insert
- not overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number:	➔ 1000.50
E-No:	121069908
EAN:	7611614104607
Packaging quantity:	10

Dimensions / Form

Thread:	M50x1.5
Spanner size:	55 mm
Dimension H:	34 mm
Thread length L:	9 mm

Connections / Entries

Min. clamping range:	37 mm
Max. clamping range:	42 mm
Clamping range with inlet min.:	33 mm
Clamping range with inlet max.:	37 mm
Clamping range UL:	34.3 - 37.2 mm
clamp technology:	Compression technology

Features


Thread type:	metric
Thread length:	short

Approvals / Certifications

Protection class:	IP69
Protection class with condition:	IP 68 (10 bar) / IP69
VDE:	Yes

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	100 °C

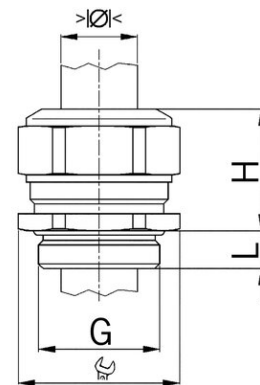

Product datasheet:



Assembly instructions



Certificates



Planning data