

## Product datasheet:

# Cable glands Progress® nickel-plated brass

## Long entry thread metric

### Approval type: Progress MS

- Two-piece sealing insert
- not overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



|                        |                |
|------------------------|----------------|
| <b>Article number:</b> | <b>1100.25</b> |
| EAN:                   | 7611614105017  |
| Packaging quantity:    | 25             |
| Price group:           | 500            |

### Dimensions / Form

|                  |         |
|------------------|---------|
| Thread:          | M25x1.5 |
| Spanner size:    | 30 mm   |
| Dimension H:     | 28 mm   |
| Thread length L: | 11 mm   |

### Connections / Entries

|                                 |                        |
|---------------------------------|------------------------|
| Min. clamping range:            | 16 mm                  |
| Max. clamping range:            | 20.5 mm                |
| Clamping range with inlet min.: | 12.5 mm                |
| Clamping range with inlet max.: | 16 mm                  |
| Clamping range UL:              | 14.5 - 16 mm           |
| clamp technology:               | Compression technology |

### Features


|                |        |
|----------------|--------|
| Thread type:   | metric |
| Thread length: | long   |

### Approvals / Certifications

|                                  |                       |
|----------------------------------|-----------------------|
| Protection class:                | IP69                  |
| Protection class with condition: | IP 68 (10 bar) / IP69 |
| VDE:                             | Yes                   |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 100 °C |

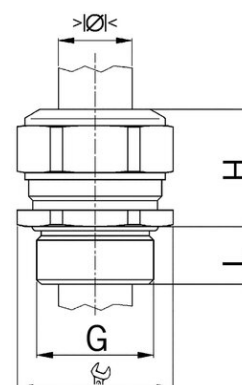

## Product datasheet:



Assembly instructions



Certificates



Planning data