

Product datasheet:

Cable glands Progress® nickel-plated brass

Short entry thread Pg

Approval type: Progress MS

- Two-piece sealing insert
- overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number:  **1060.09**

EAN: 7611614106472

Packaging quantity: 50

Price group: 500

Dimensions / Form

Thread: Pg 9

Spanner size: 18 mm

Dimension H: 22 mm

Thread length L: 6 mm

Connections / Entries

Min. clamping range: 8 mm

Max. clamping range: 10.5 mm

Clamping range with inlet min.: 6 mm

Clamping range with inlet max.: 8 mm

Clamping range UL: 7.1 - 8 mm

clamp technology: Compression technology

Features

Thread type: metric

Thread length: short

Approvals / Certifications


Protection class: IP69

Protection class with condition: IP 68 (10 bar) / IP69

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 100 °C

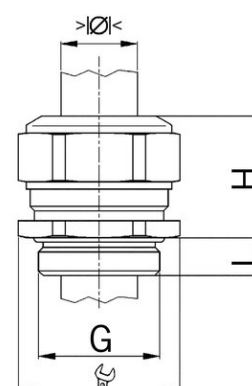

Assembly instructions



Planning data