

Product datasheet:

Cable glands Progress® nickel-plated brass

Short entry thread Pg

Approval type: Progress MS

- Two-piece sealing insert
- overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number:	➔ 1060.11
E-No:	121063208
EAN:	7611614106489
Packaging quantity:	50

Dimensions / Form

Thread:	Pg 11
Spanner size:	21 mm
Dimension H:	21 mm
Thread length L:	6 mm

Connections / Entries

Min. clamping range:	8.5 mm
Max. clamping range:	12 mm
Clamping range with inlet min.:	5.5 mm
Clamping range with inlet max.:	8.5 mm
Clamping range UL:	7 - 12 mm
clamp technology:	Compression technology

Features


Thread type:	metric
Thread length:	short

Approvals / Certifications

Protection class:	IP69
Protection class with condition:	IP 68 (10 bar) / IP69

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	100 °C

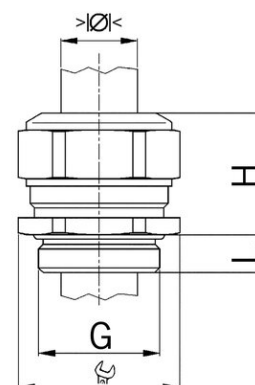

Assembly instructions



Planning data