

Product datasheet:

Cable glands Progress® nickel-plated brass

Short entry thread Pg

Approval type: Progress MS

- Two-piece sealing insert
- not overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number: **1000.48**

EAN: 7611614106045

Packaging quantity: 10

Price group: 500

Dimensions / Form

Thread: Pg 48

Spanner size: 65 mm

Dimension H: 37 mm

Thread length L: 11 mm

Connections / Entries

Min. clamping range: 43 mm


Max. clamping range: 49 mm

Clamping range with inlet min.: 37 mm

Clamping range with inlet max.: 43 mm

Clamping range UL: 37 - 49 mm

clamp technology: Compression technology

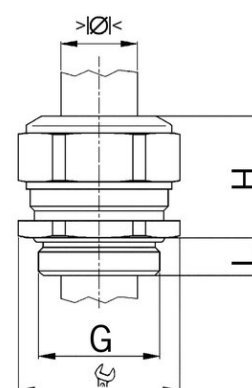

Features

Thread type: metric

Thread length: short

Approvals / Certifications

Protection class: IP69

Protection class with condition: IP 68 (10 bar) / IP69

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 100 °C



Assembly instructions



Planning data