


Product datasheet:

OTO-UP FTTH, ready to splice with pre-assembled cable, 15m (Dca)

OTO-UP FTTH, flush-mounting, pre-terminated on one side

· 4x fibres, 4x LC/APC

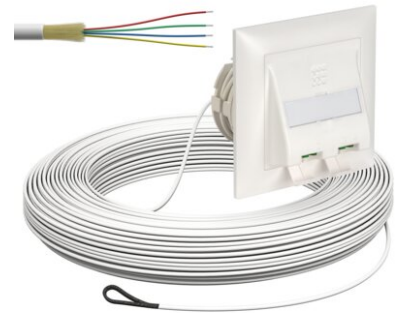

Article number:	8652.2.3.150GE
E-No:	866700593
EAN:	7611614462844
Packaging quantity:	1

Dimensions / Form

Product length:	86 mm
Product width:	86 mm



Safety / Properties

Halogen-free:	Yes
---------------	-----

Features

Fibre class:	Single Mode OS2 (G.657.A2)
Fibre type:	4x 9/125 LowBand ITU G657.A
Cable/line length:	15 m
Number of fibres (max.):	4
Fibre colour coding:	1 = red, 2 = green, 3 = yellow, 4 = blue

Approvals / Certifications

BauPVo:	Dca according to EN50575:2017 + A1:2016
Protection class:	IP20
Classification connectivity:	Dca

Storage / Installation / Operation

Minimum storage temperature:	-10 °C
Maximum storage temperature:	60 °C
Minimum installation temperature:	-10 °C
Installation temperature max.:	60 °C
Minimum operating temperature:	-20 °C
Maximum operating temperature:	60 °C

The optical termination outlet will be the termination point of the optical fibre cable within the appartement / home. Due to the pre-assembled cable in 7-8 different cable lengths, this variant forms an optimal solution for structured cabling.