


Product datasheet:

AGRO OTO-AP FTTH E3S Connect®, BEP plug-in, 25m (B2ca)

OTO-AP FTTH E3S Connect®, BEP plug-in

· 4x fibres, 4x LC/APC

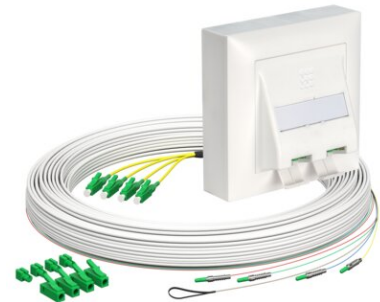

Article number:	⇒ 4175010
E-No:	866700123
EAN:	7611614473604
Packaging quantity:	1

Dimensions / Form

Product length:	86 mm
Product width:	86 mm
Product depth:	20 mm



Safety / Properties

Halogen-free:	Yes
---------------	-----

Features

Fibre class:	Single Mode OS2 (G.657.A2)
Fibre type:	Single Mode Optical Fibre
Cable/line length:	25 m
Number of fibres (max.):	4
Fibre colour coding:	1 = red, 2 = green, 3 = yellow, 4 = blue

Approvals / Certifications

BauPVo:	B2ca according to EN 50575:2014 + A1:2016
Protection class:	IP20

Storage / Installation / Operation

Minimum storage temperature:	-10 °C
Maximum storage temperature:	60 °C
Minimum installation temperature:	-10 °C
Installation temperature max.:	60 °C
Minimum operating temperature:	-20 °C
Maximum operating temperature:	60 °C

The fibre-optic subscriber connection forms the termination point for fibre-optic cables in the home. The innovative and splice-free E3S Connect® system enables simple, fast expansion of the FTTH concept. The pre-assembled cables with E3S Connect® – LC/APC connectors can also be blown in, pulled in and pushed in. A handy roll-off box with different cable lengths enables precise planning and easy installation.