


Product datasheet:

AGRO OTO-UP FTTH E3S Connect®, BEP plug-in, 25m (B2ca)

AGRO OTO-UP FTTH E3S Connect®, BEP plug-in

· 4x fibres, 4x LC/APC

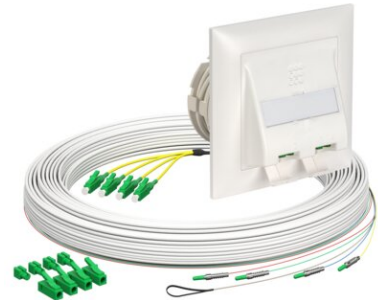

Article number: ➔ 4176010

E-No: 866700243

EAN: 7611614473703

Packaging quantity: 1

Dimensions / Form

Product length: 86 mm

Product width: 86 mm



Safety / Properties

Halogen-free: Yes

Features

Fibre class: Single Mode OS2 (G.657.A2)

Fibre type: Single Mode Optical Fibre

Cable/line length: 25 m

Number of fibres (max.): 4

Fibre colour coding: 1 = red, 2 = green, 3 = yellow, 4 = blue

Approvals / Certifications

BauPVo: B2ca according to EN 50575:2014 + A1:2016

Protection class: IP20

Storage / Installation / Operation

Minimum storage temperature: -10 °C

Maximum storage temperature: 60 °C

Minimum installation temperature: -10 °C

Installation temperature max.: 60 °C

Minimum operating temperature: -20 °C

Maximum operating temperature: 60 °C

Innovative fibre-optic subscriber connection with an installation depth of max. 32mm for precise flush-mounting installation in all common one-gang junction boxes. The robust metal support ring with alignment markings allows convenient mounting with screw fasteners. Perfect fibre deposit management through a rotatable and removable deposit drum on the back. Equipped with 1x LC/APC Quad coupling including shutter and dust protection. Design compatibility with all common switch manufacturers with a standardised TAE cover