


## Product datasheet:

# AGRO OTO-AP FTTH E3S Connect®, BEP plug-in, 30m (B2ca)

## OTO-AP FTTH E3S Connect®, BEP plug-in

· 4x fibres, 4x LC/APC

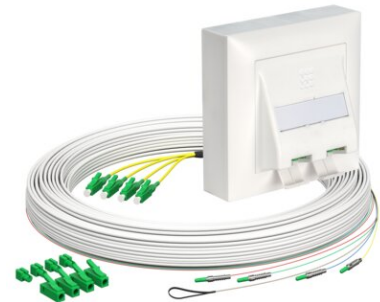

|                        |                  |
|------------------------|------------------|
| <b>Article number:</b> | <b>⇒ 4175011</b> |
| E-No:                  | 866700133        |
| EAN:                   | 7611614473611    |
| Packaging quantity:    | 1                |

### Dimensions / Form

|                 |       |
|-----------------|-------|
| Product length: | 86 mm |
| Product width:  | 86 mm |
| Product depth:  | 20 mm |



### Safety / Properties

|               |     |
|---------------|-----|
| Halogen-free: | Yes |
|---------------|-----|

### Features

|                          |                                          |
|--------------------------|------------------------------------------|
| Fibre class:             | Single Mode OS2 (G.657.A2)               |
| Fibre type:              | Single Mode Optical Fibre                |
| Cable/line length:       | 30 m                                     |
| Number of fibres (max.): | 4                                        |
| Fibre colour coding:     | 1 = red, 2 = green, 3 = yellow, 4 = blue |

### Approvals / Certifications

|                   |                                           |
|-------------------|-------------------------------------------|
| BauPVo:           | B2ca according to EN 50575:2014 + A1:2016 |
| Protection class: | IP20                                      |

### Storage / Installation / Operation

|                                   |        |
|-----------------------------------|--------|
| Minimum storage temperature:      | -10 °C |
| Maximum storage temperature:      | 60 °C  |
| Minimum installation temperature: | -10 °C |
| Installation temperature max.:    | 60 °C  |
| Minimum operating temperature:    | -20 °C |
| Maximum operating temperature:    | 60 °C  |

The fibre-optic subscriber connection forms the termination point for fibre-optic cables in the home. The innovative and splice-free E3S Connect® system enables simple, fast expansion of the FTTH concept. The pre-assembled cables with E3S Connect® – LC/APC connectors can also be blown in, pulled in and pushed in. A handy roll-off box with different cable lengths enables precise planning and easy installation.