


## Product datasheet:

### E3S Connect® (FO-SC) subscriber connection, surface-mounting, 2xF, LC/APC DX, L=60m, HTP

#### E3S Connect® (FO-SC) subscriber connection, surface-mounting with E3S fibre-optic cable for connection to the house transfer point (HTP)

· Scope of delivery: FO subscriber connection, LC-APC coupling and pre-assembled E3S Connect® fibre optic cable

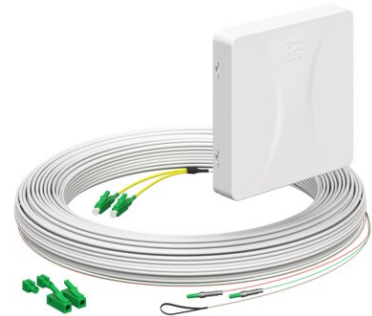

|                        |                  |
|------------------------|------------------|
| <b>Article number:</b> | <b>⇒ 4252059</b> |
| EAN:                   | 4013456585720    |
| Packaging quantity:    | 10               |
| Price group:           | 730              |

#### Dimensions / Form

|                 |       |
|-----------------|-------|
| Product length: | 85 mm |
| Product width:  | 85 mm |
| Product depth:  | 16 mm |

#### Safety / Properties

|               |     |
|---------------|-----|
| Halogen-free: | Yes |
|---------------|-----|

#### Features

|                           |                            |
|---------------------------|----------------------------|
| Network level:            | 4                          |
| Fibre class:              | Single Mode OS2 (G.657.A2) |
| Fibre type:               | Single Mode Optical Fibre  |
| Cable/line length:        | 60 m                       |
| Splice cassette quantity: | 1                          |
| Number of fibres (max.):  | 2                          |
| Fibre colour coding:      | 2-fibres: 1=red, 2=green   |

#### Approvals / Certifications

|                   |                                           |
|-------------------|-------------------------------------------|
| BauPVo:           | B2ca according to EN 50575:2014 + A1:2016 |
| Protection class: | IP20                                      |

#### Storage / Installation / Operation

|                                   |        |
|-----------------------------------|--------|
| Minimum storage temperature:      | -10 °C |
| Maximum storage temperature:      | 60 °C  |
| Minimum installation temperature: | -10 °C |
| Installation temperature max.:    | 60 °C  |
| Minimum operating temperature:    | -20 °C |



Assembly instructions

## Product datasheet:

Maximum operating temperature:

60 °C

The fibre-optic subscriber connection forms the termination point for fibre-optic cables in the home. The innovative and splice-free E3S Connect® system enables simple, fast expansion of the FTTH concept. The pre-assembled cables with E3S Connect® – LC/APC connectors can also be blown in, pulled in and pushed in. A handy roll-off box with different cable lengths enables precise planning and easy installation.

- Compact fibre-optic subscriber connection
- Dimensions: 85x85x16 mm (LxWxH)
- Colour similar to RAL9003 signal white
- with pre-assembled E3S fibre-optic cable in lengths of 10 - 100 m – other lengths available on request
- Available with 2 or 4 fibres
- High-quality fibre-optic cable G.657.A2 and BauPVo B2ca
- Cable retractable, insertable and blowable
- Pre-assembled cable is delivered in a handy unwinding box
- Subscriber connection enclosed