


Product datasheet:

E3S Connect® (FO-SC) subscriber connection, surface-mounting, 4xF, LC/APC DX, L=40m, HTP

E3S Connect® (FO-SC) subscriber connection, surface-mounting with E3S fibre-optic cable for connection to the house transfer point (HTP)

· Scope of delivery: FO subscriber connection, LC-APC coupling and pre-assembled E3S Connect® fibre optic cable

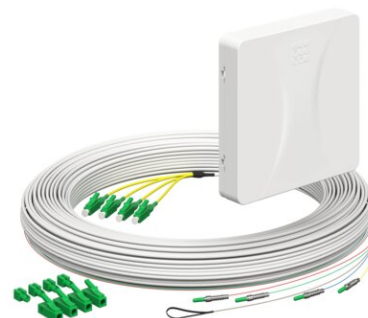

Article number:  **4252069**

EAN: 4013456585928

Packaging quantity: 10

Price group: 730

Dimensions / Form

Product length: 85 mm

Product width: 85 mm

Product depth: 16 mm

Safety / Properties

Halogen-free: Yes

Features

Network level: 4

Fibre class: Single Mode OS2 (G.657.A2)

Fibre type: Single Mode Optical Fibre

Cable/line length: 40 m

Splice cassette quantity: 1

Number of fibres (max.): 4

Fibre colour coding: 4-fibres: 1=red, 2=green, 3=blue, 4=yellow

Approvals / Certifications

BauPVo: B2ca according to EN 50575:2014 + A1:2016

Protection class: IP20

Storage / Installation / Operation

Minimum storage temperature: -10 °C

Maximum storage temperature: 60 °C

Minimum installation temperature: -10 °C

Installation temperature max.: 60 °C

Minimum operating temperature: -20 °C



Assembly instructions

Product datasheet:

Maximum operating temperature:

60 °C

The fibre-optic subscriber connection forms the termination point for fibre-optic cables in the home. The innovative and splice-free E3S Connect® system enables simple, fast expansion of the FTTH concept. The pre-assembled cables with E3S Connect® – LC/APC connectors can also be blown in, pulled in and pushed in. A handy roll-off box with different cable lengths enables precise planning and easy installation.

- Compact fibre-optic subscriber connection
- Dimensions: 85x85x16 mm (LxWxH)
- Colour similar to RAL9003 signal white
- with pre-assembled E3S fibre-optic cable in lengths of 10 - 100 m – other lengths available on request
- Available with 2 or 4 fibres
- High-quality fibre-optic cable G.657.A2 and BauPVo B2ca
- Cable retractable, insertable and blowable
- Pre-assembled cable is delivered in a handy unwinding box
- Subscriber connection enclosed