

Product datasheet:

House transfer point HTP, 14 fibres, 7 LC/APC DX, ready to splice

- Pre-assembled LC duplex adapters and color-coded pigtails.
- Easy installation.
- Clear assembly sequence.
- Universally applicable (for indoor use).
- Sealable.
- Suitable for most adapters (incl. 7x LC Duplex adapter with internal shutter).
- Suitable for 16 splice protectors ANT and Mini heatshrink.
- Approved by atene KOM.
- Scope of delivery: HTP with cover, LC/APC duplex coupling, ready to splice

House connection point (HÜP) as termination point for line technology (APL). Suitable for surface mounting. Consisting of base plate, splice cassette, housing cover and coupling bracket. Has a slot for microducts, single-pull seals and fibre optic customer cables. 1x input for microducts and 6x inputs for fibre optic customer cables. Equipped with 7x LC/APC duplex couplings with integrated shutter and dust caps. Coupling locking spring snaps in on the inside. Coupling can only be released by completely opening the housing cover. Cover cap to protect the plug connector from access. Slot for ANT crimp splice protection and mini heat-shrink tubing. Slot for up to 14x fibre optics and splices distributed across 1x splice cassette. Pre-assembled and ready for splicing with LC/APC SX pigtail. Sealable with Torx screw, screw attachment between housing cover and base plate. Approved for subsidy projects by atene KOM .

Dimensions: 153 x 91 x 61 mm (LxWxH)

Weight: 200 g

Colour: White

Scope of delivery: House transfer point, coupling

Installation type: Surface-mounted

Protection class: IP20

Number of fibres: 14

Number of splice cassettes: 1

Number of couplings: 7

Coupling design: LC/APC DX shutter

Number of pigtails: 14

Pigtail design: LC/APC SX

Approved by atene KOM: Yes

Halogen-free: Yes

Loop length: 250 mm (splice cassette)

Bending radius: 30 mm (splice cassette)

Splice protection holder: ANT crimp / mini heat-shrink tubing


Number of cable/conduit entries: 6

Cable/conduit entry Ø: 1x 10.0 mm, 1x 4.5 mm, 4x 4.0 mm

Storage temperature range -10 °C / +60 °C

Installation temperature range -10 °C / +60 °C

Operating temperature range -20 °C / +60 °C

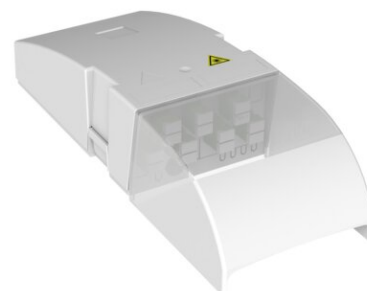

Assembly instructions



Technical information

Article number: **AT29243**

EAN: 8712259505824

Packaging quantity: 4

Dimensions / Form

Product length: 153 mm

Product width: 91 mm

Safety / Properties

Halogen-free: Yes

Product datasheet:

atene KOM approved:	Yes
---------------------	-----

Features

Network level:	3
Splice cassette quantity:	1
Number of fibres (max.):	14
Microtube size (max.):	10 mm

Approvals / Certifications

Protection class:	IP20
-------------------	------

Storage / Installation / Operation

Minimum storage temperature:	-10 °C
Maximum storage temperature:	60 °C
Minimum installation temperature:	-10 °C
Installation temperature max.:	60 °C
Minimum operating temperature:	-20 °C
Maximum operating temperature:	60 °C

ETIM Product classification: Distributor for telecommunication

Model:	Distributor enclosure
Mounting method:	Surface mounted
With connecting lugs:	No
Max. number of dual cores:	
Mounting dimension (standardised):	Other
110-compatible:	No
LSA:	No
SID:	
Material:	Plastic
Degree of protection (IP):	IP20
Degree of protection (NEMA):	
Colour:	White
Height:	150 mm
Width:	80 mm
Depth:	38 mm
Number of mountable connection strips:	
DIN-compatible:	
Compatible with Grade2TV according to XP-C 90-483:	
Compatible with Grade3TV according to XP-C 90-483:	