


Productgegevensblad:

House transfer point HTP, 14 fibres, 7 LC/APC DX, ready to splice

- Voorgemonteerde LC-duplexadapters en kleurgecodeerde Pigtails.
- Eenvoudige installatie.
- Duidelijke montagevolgorde.
- Universeel toepasbaar (voor binnengebruik).
- Verzegelbaar.
- Geschikt voor de meeste adapters (incl. 7x LC Duplex adapter met interne sluiters).
- Geschikt voor 16 lasbeschermers ANT en Mini heatshrink.
- Goedgekeurd door Atene KOM.
- Scope of delivery: HTP with cover, LC/APC duplex coupling, ready to splice

House connection point (HÜP) as termination point for line technology (APL). Suitable for surface mounting. Consisting of base plate, splice cassette, housing cover and coupling bracket. Has a slot for microducts, single-pull seals and fibre optic customer cables. 1x input for microducts and 6x inputs for fibre optic customer cables. Equipped with 7x LC/APC duplex couplings with integrated shutter and dust caps. Coupling locking spring snaps in on the inside. Coupling can only be released by completely opening the housing cover. Cover cap to protect the plug connector from access. Slot for ANT crimp splice protection and mini heat-shrink tubing. Slot for up to 14x fibre optics and splices distributed across 1x splice cassette. Pre-assembled and ready for splicing with LC/APC SX pigtail. Sealable with Torx screw, screw attachment between housing cover and base plate. Approved for subsidy projects by atene KOM .

Dimensions: 153 x 91 x 61 mm (LxWxH)
 Weight: 200 g
 Colour: White
 Scope of delivery: House transfer point, coupling
 Installation type: Surface-mounted
 Protection class: IP20
 Number of fibres: 14
 Number of splice cassettes: 1
 Number of couplings: 7
 Coupling design: LC/APC DX shutter
 Number of pigtails: 14
 Pigtail design: LC/APC SX
 Approved by atene KOM: Yes
 Halogen-free: Yes
 Loop length: 250 mm (splice cassette)
 Bending radius: 30 mm (splice cassette)
 Splice protection holder: ANT crimp / mini heat-shrink tubing
 Number of cable/conduit entries: 6
 Cable/conduit entry Ø: 1x 10.0 mm, 1x 4.5 mm, 4x 4.0 mm
 Storage temperature range -10 °C / +60 °C
 Installation temperature range -10 °C / +60 °C
 Operating temperature range -20 °C / +60 °C

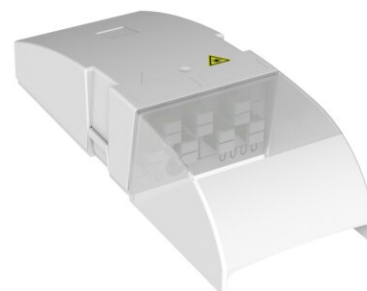

Montage-instructies



Technische informatie

Artikelnummer:	➔ AT29243
EAN:	8712259505824
Verpakkingshoeveelheid:	4

Afmetingen / Vorm

Productlengte:	153 mm
Productbreedte:	91 mm

Veiligheid / Eigenschappen

Halogeenvrij:	Ja
---------------	----

Productgegevensblad:

atene KOM goedgekeurd: Ja

Uitrusting

Netniveau:	3
Spleiškassette Anzahl:	1
Aantal vezels:	14
Afmetingen microbuis:	10 mm

Keuringen / Certificeringen

Beschermingsklasse:	IP20
---------------------	------

Opslag / Installatie / Gebruik

Temperatuur opslag min.:	-10 °C
Temperatuur opslag max.:	60 °C
Temperatuur installatie min.:	-10 °C
Temperatuur installatie max.:	60 °C
Gebruikstemperatuur min.:	-20 °C
Gebruikstemperatuur max.:	60 °C

ETIM Productklasse: Verdeler telecommunicatie

Uitvoering:	Verdeelkast
Montagewijze:	Opbouw
Klemmenstrook, contactstrook, aansluitblok:	Nee
Max. aantal dubbele aders (DA):	
Bevestigingsmaat:	Overig
110-compatibel:	Nee
LSA:	Nee
SID:	
Materiaal:	Kunststof
Beschermingsgraad (IP):	IP20
Beschermingsgraad (NEMA):	
Kleur:	Wit
Hoogte:	150 mm
Breedte:	80 mm
Diepte:	38 mm
Aantal in te bouwen aansluitrails:	
DIN-compatibel:	
Compatibel met Grade2TV volgens XP-C 90-483:	
Compatibel met Grade3TV volgens XP-C 90-483:	