


Product datasheet:

Building distributor (Gf-GV), 192 fibres, CSP, 16 outlets, loop, IP65

Hybrid FiberManagement Box

- Flexibility in the FTTX concept.
- Flexibility in fiber network management.
- Integrated strain relief per cable / duct.
- Easy entry seal for each individual cable or duct.
- Structured management of cables, fibres and welding protectors.
- Suitable for direct buried customer cables and ducts
- Easy to install.
- Save on working time
- IP65 Waterproof
- Impact-resistant.
- Window Cut.
- Scope of delivery: FMB including splice cassettes, 4x mounting screws, sealing material, mounting bracket

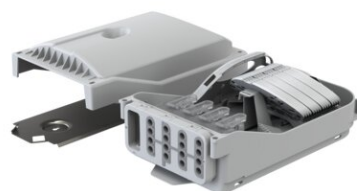

Article number: **↻ AT29336**

EAN: 8712259542669

Price group: 720

Dimensions / Form

Product length: 380 mm

Product width: 220 mm

Product depth: 130 mm

Safety / Properties

Halogen-free: Yes

Features

Network level: 4

Splice cassette quantity: 16

Number of fibres (max.): 192

Microtube size (max.): 10 mm

Approvals / Certifications

Protection class: IP65

Storage / Installation / Operation

Minimum storage temperature: -10 °C

Maximum storage temperature: 60 °C

Minimum installation temperature: -10 °C

Installation temperature max.: 60 °C

Minimum operating temperature: -20 °C

Maximum operating temperature: 60 °C

Product datasheet:

Attema's Fiber Management Box (FM Box) is an above-ground distribution point (DP) that has been specially developed for at most 48 so-called Fiber-to-the-Home subscriber connection cables or ducts. For the splice mechanic the working method for sorting, splicing and storing the fiberglass cables is the same as for Attema's well-known underground Fiber Management Plate(FMP). Thanks to the pre-assembled parts, the compact format, the supplied suspension bracket and the ease of assembly, the FM-Box is excellent suitable to use in the Attema street cabinet as well as in interior technical rooms. The FM Box is also available with a lock and a Window Cut.