

Product datasheet:

Quickbox® Kombi 2x2

Quickbox® inlet boxes

- Compatible with Feller SNAPFIX®
- for plate thickness 7 - 35 mm
- indispensable in light and column construction
- Retrofitting is possible
- Extremely robust construction
- For device screws Ø 3 mm
- Max. tightening torque 0.5 Nm
- does not match with the following types:
- Prestige model by Feller Edizio Due
- Glass, stainless steel, concrete, granite, aluminium and brass by Levy Sidus



Article number:  **9098-77.04**

E-No: 372630309

EAN: 7611614231686

Packaging quantity: 10

Dimensions / Form

Product Ø:	83 mm
Product length:	145 mm
Product width:	145 mm
Product depth:	65 mm
Installation opening (wall/ceiling) Ø:	83 mm
Drill/cut hole Ø:	83 mm

Connections / Entries


For conduit Ø: 25 mm

Assembly / Installation

Assembly type: HW (drywall/lightweight construction)

The well-known AGRO cavity wall box with proven lug fastening technology and improved product features. A practical design and a targeted selection of pipe entries allow a wide range of possible uses. Additional special applications such as installation in thinly planked walls with the aid of the zero clamping lug round off the diverse range. The certifications from Electrosuisse and ESTI document the high quality standards.

- Compatible with Feller SNAPFIX®

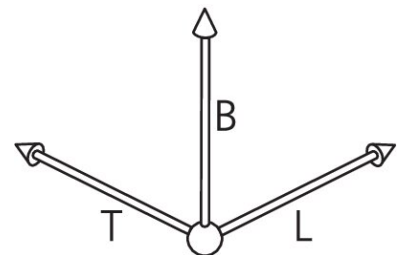

Assembly instructions



Certificates



Planning data