

Product datasheet:

Flush-mounting back boxes with glow wire test 850°

- Compatible with Feller SNAPFIX®
- Can be combined
- Essential in timber construction
- Electrically well-insulated, shock and pressure-resistant.
- Flat bearing surface thanks to 4 support points
- For device screws Ø 3 mm
- Max. tightening torque 0.5 Nm

Article number: [99.1234.850](#)

E-No: 372011129

EAN: 7611614220178

Packaging quantity: 50

Dimensions / Form

Product length: 72 mm

Product width: 72 mm

Product depth: 57 mm

Connections / Entries


For conduit Ø: 25 mm

Assembly / Installation

Assembly type: HW (drywall/lightweight construction)

The in-wall boxes without halogene are suitable for installations on combustible materials. The boxes are produced in white polypropylene and have successfully passed the glow wire test at 850°C according to EN 60695-2-11.

- Essential in timber construction
- Electrically well-insulated, shock and pressure-resistant.
- Flat bearing surface thanks to 4 support points
- Compatible with Feller SNAPFIX®

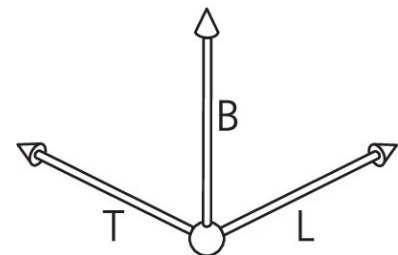

Assembly instructions



Certificates



Planning data