

Product datasheet:

Flush-mounting back boxes with glow wire test 850°

- Compatible with Feller SNAPFIX®
- Essential in timber construction
- Electrically well-insulated, shock and pressure-resistant.
- Flat bearing surface thanks to 4 support points
- For device screws Ø 3 mm
- Max. tightening torque 0.5 Nm

Article number:	 9924.850
E-No:	372111229
EAN:	7611614220215
Packaging quantity:	5

Dimensions / Form

Product length:	130 mm
Product width:	130 mm
Product depth:	70 mm

Connections / Entries



Number of entries:	16
For conduit Ø:	25 mm

Assembly / Installation

Assembly type:	HW (drywall/lightweight construction)
----------------	---------------------------------------

The in-wall boxes without halogene are suitable for installations on combustible materials. The boxes are produced in white polypropylene and have successfully passed the glow wire test at 850°C according to EN 60695-2-11.

- Essential in timber construction
- Electrically well-insulated, shock and pressure-resistant.
- Flat bearing surface thanks to 4 support points
- Compatible with Feller SNAPFIX®

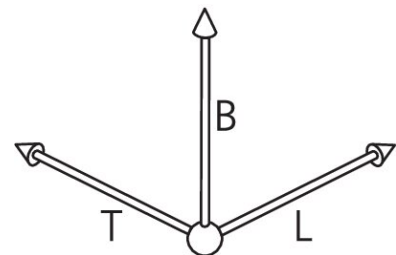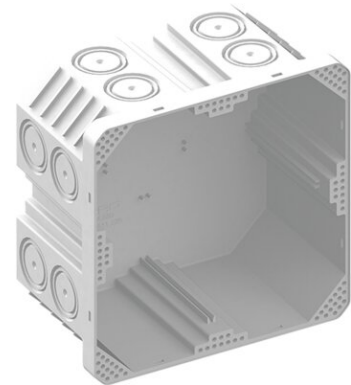

Assembly instructions



Certificates



Planning data