

Product datasheet:

Air-tight sleeves for cables


Air-tight sleeve

- Continuous sealing by means of air-tight layers for penetration of cables
- extremely strong adhesion
- Temperature resistance -30°C to +80°C, in the feed-through area up to +120°C
- UV-resistant, halogen-free

Air-tight sleeve for permanent sealing of electric cable penetrations through air-tight layers,

Self-adhesive air-tight sleeve with anti-kink sleeve to compensate for movements during installation or on-site, for two electric cables Ø 8-12 mm, air-tight design in accordance with DIN 18015-5.

Temperature resistant from -30°C to 80°C, UV resistant, halogen-free in accordance with DIN VDE 0604-2-100

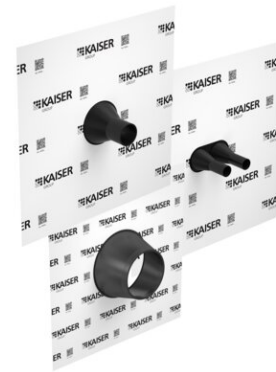

Article number:	9059-47
E-No:	171535318
EAN:	4013456480339
Inner packing / Packaging quantity:	10 / 30

Dimensions / Form

Product length:	150 mm
Product width:	150 mm
Product depth:	30 mm

Connections / Entries

Type of entry:	electric cable
Number of entries:	2
For conduit Ø:	12 mm
Wire entry Ø min.:	8 mm
Wire entry Ø max.:	12 mm

Assembly / Installation

Assembly type:	HW (drywall/lightweight construction)
----------------	---------------------------------------

Safety / Properties

air tightness:	Yes
----------------	-----

Air-tight sleeve for sealing conduit and cable entries in the interior of air-tight building shells.

- extremely strong adhesion
- For guaranteed air-tight feed-throughs, especially in the attic
- 12 types for different conduit and cable diameters
- Suitable for moisture barrier foils, sarking membranes, OSB boards *



Assembly instructions



Planning data