

Product datasheet:

ECON® Cable-sleeve


Multiple air-tight sleeves ECON®

- 1-piece
- extremely strong adhesion
- Temperature resistance from -25°C to +80°C
- UV-resistant, halogen-free

Multiple air-tight sleeve for permanent sealing of pipe penetrations through air-tight layers.

Self-adhesive air-tight sleeve with anti-kink sleeve to compensate for movements during installation or on-site, for 6 pipes Ø 4-11 mm, air-tight design in accordance with DIN 18015-5.

Temperature resistant from -30°C to 80°C, UV resistant, halogen-free in accordance with DIN VDE 0604-2-100

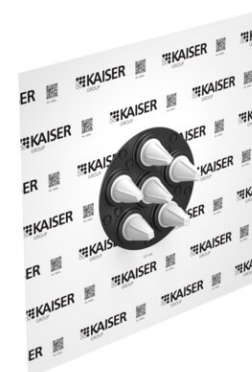

Article number:  **9059-61**

EAN: 4013456537392

Packaging quantity: 5

Price group: 180

Dimensions / Form

Product length: 230 mm

Product width: 230 mm

Product depth: 25 mm

Connections / Entries

Type of entry: electric cable

Number of entries: 6

For conduit Ø: 10mm

Wire entry Ø min.: 4 mm

Wire entry Ø max.: 11 mm

Assembly / Installation

Assembly type: HW (drywall/lightweight construction)



Assembly instructions



Planning data

Cable and conduit sleeve ECON® for reliable sealing of up to 6 cable or conduit entries through the air-tight building shell - ideal for digital satellite units.

- Flexible sealing of 1 to 6 cables or conduits
- Low space requirement, powerful adhesion
- Completely toolless wall installation
- Sealing even when cables are extremely kinked
- Unused entries are reserved for later installations