

Product datasheet:

ECON® Conduit-sleeve


Multiple air-tight sleeves ECON®

- 1-piece
- extremely strong adhesion
- Temperature resistance from -25°C to +80°C
- UV-resistant, halogen-free

Multiple air-tight sleeve for permanent sealing of pipe penetrations through air-tight layers,

Self-adhesive air-tight sleeve with anti-kink sleeve to compensate for movements during installation or on-site, for 6 conduits Ø 16-25 mm, air-tight design in accordance with DIN 18015-5.

Temperature resistant from -30°C to 80°C, UV resistant, halogen-free in accordance with DIN VDE 0604-2-100

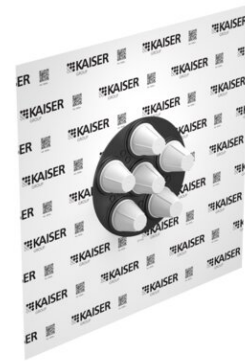

Article number:	9059-62
E-No:	171535398
EAN:	4013456537385
Packaging quantity:	5

Dimensions / Form

Product length:	320 mm
Product width:	320 mm
Product depth:	30 mm

Connections / Entries

Type of entry:	conduit
Number of entries:	6
For conduit Ø:	16 mm
Wire entry Ø min.:	16 mm
Wire entry Ø max.:	25 mm

Assembly / Installation

Assembly type:	HW (drywall/lightweight construction)
----------------	---------------------------------------

Cable and conduit sleeve ECON® for reliable sealing of up to 6 cable or conduit entries through the air-tight building shell - ideal for digital satellite units.

- Flexible sealing of 1 to 6 cables or conduits
- Low space requirement, powerful adhesion
- Completely toolless wall installation
- Sealing even when cables are extremely kinked
- Unused entries are reserved for later installations



Assembly instructions



Planning data