

Product datasheet:

ECON® Conduit-sleeve


Multiple air-tight sleeves ECON®

- 1-piece
- extremely strong adhesion
- Temperature resistance from -25°C to +80°C
- UV-resistant, halogen-free

Multiple air-tight sleeve for permanent sealing of pipe penetrations through air-tight layers,

Self-adhesive air-tight sleeve with anti-kink sleeve to compensate for movements during installation or on-site, for 6 conduits Ø 16-25 mm, air-tight design in accordance with DIN 18015-5.

Temperature resistant from -30°C to 80°C, UV resistant, halogen-free in accordance with DIN VDE 0604-2-100

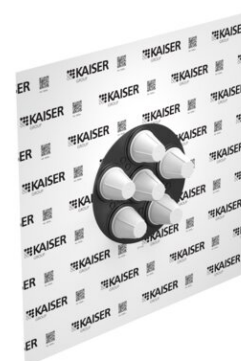

Article number: **9059-62**

EAN: 4013456537385

Packaging quantity: 5

Dimensions / Form

Product length: 320 mm

Product width: 320 mm

Product depth: 30 mm

Connections / Entries

Type of entry: conduit

Number of entries: 6

For conduit Ø: 16 mm

Wire entry Ø min.: 16 mm

Wire entry Ø max.: 25 mm

Assembly / Installation

Assembly type: HW (drywall/lightweight construction)

ETIM Product classification:

Accessories/spare parts for junction boxes/cases for mounting in the wall

Type of accessory/spare part: Other

Accessory: No

Spare part:

Suitable for built-in installation box: No

Suitable for central conduit box: No

Cable and conduit sleeve ECON® for reliable sealing of up to 6 cable or conduit entries through the air-tight building shell - ideal for digital satellite units.



Planning data

Product datasheet:

- Flexible sealing of 1 to 6 cables or conduits
- Low space requirement, powerful adhesion
- Completely toolless wall installation
- Sealing even when cables are extremely kinked
- Unused entries are reserved for later installations