

## Product datasheet:

# Fleece-butyl sealing sleeve


## Fleece-butyl sealing sleeves

- For cables Ø 4 - 15 mm and conduits Ø 15 - 110 mm
- Fleece-butyl sealing sleeve can be plastered over
- Self-adhesive.
- 1-piece

Fleece butyl sealing sleeve for permanent sealing of pipe penetrations through masonry, concrete, wood-based materials and much more.

Self-adhesive air-tight sleeve with anti-kink sleeve to compensate for movements during installation or on-site, for individual electric cables Ø 4-8 mm, air-tight design in accordance with DIN 18015-5.

Temperature resistant from -20°C to 100°C, UV resistant, halogen-free in accordance with DIN VDE 0604-2-100.

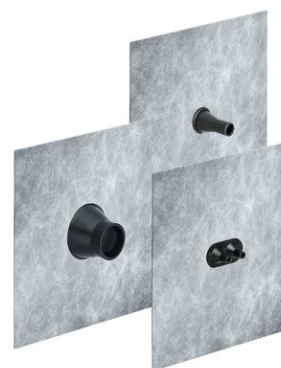

**Article number:** **9089-44**

**EAN:** 4013456538313

**Inner packing / Packaging quantity:** 10 / 30

**Price group:** 180

### Dimensions / Form

**Product length:** 150 mm

**Product width:** 150 mm

**Product depth:** 30 mm

### Connections / Entries

**Type of entry:** electric cable

**Number of entries:** 1

**Wire entry Ø min.:** 4 mm

**Wire entry Ø max.:** 8 mm

### Assembly / Installation

**Assembly type:** HW (drywall/lightweight construction)

### Safety / Properties

**air tightness:** Yes

For permanent, secure sealing of installation penetrations in masonry, concrete or wood materials, etc. The highly-elastic sleeves are fitted with fleece-butyl flanges as plaster bases and provide maximum adhesion. Some surfaces must be pre-treated with KAISER primer.

- Permanently moisture-proof - for use indoors and outdoors
- The fleece sleeve can be plastered over, and is for use in plastered walls and behind composite thermal insulation systems.
- Waterproofing effect with non-pressing water, e.g. against soil moisture



Assembly instructions



Planning data