


Product datasheet:

ThermoX® universal front ring

ThermoX® installation housing

- for retrofitting or as spare part
- Universal front ring

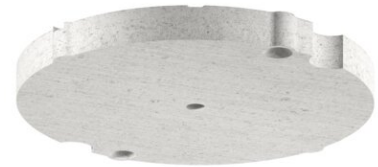

Article number:	↗ 9300-93
EAN:	4013456470354
Packaging quantity:	10
Price group:	160

Assembly / Installation

Assembly type:	HW (drywall/lightweight construction)
----------------	---------------------------------------

Safety / Properties

Special application:	Without
----------------------	---------

ThermoX® installation housing for installing halogen and pivoting recessed LED luminaires in various ceiling structures. The housing protects the surrounding material (moisture barrier foil, insulation etc.) from the lamp's extreme operating temperatures and creates an air-tight closure.

- Installation housing for halogen luminaires (low voltage and high voltage)
- Fire-preventive and air-tight
- For insulated hollow ceilings
- Two different front part types
- Integrated transformer closing cap
- Ceiling exits (CE) up to Ø 86 mm
- Installation from either above or below



Assembly instructions



Planning data