

Product datasheet:

AK2-S enclosure base IP40

Cable-mate® cableboxes for dry indoor use

- Packed per junction box 3 KBS 16 mm slide inlets and 1 shutter slide.
- Specially designed for applications without mounting plate.
- Matching AK2 front part can be ordered separately.
- Suitable for cable trays from Legrand (Van Geel), Stago, Niedax, Vergokan, PUK and OBO.
- Each article is packaged with 3x KBS 16 mm inlets and 1 locking slider
- Suitable for cable support systems from well-known manufacturers

AK2 distribution enclosure in accordance with DIN EN 60670, for plug-in electrical installation, base enclosure with electric cable and conduit entries for electric cables $\varnothing$ 8-14 mm, for conduits max. $\varnothing$ 16 mm, dimensions L x W x H: 120 x 95 x 40 mm
 Protection class: IP40
 Rated voltage: 690 V
 Mounting: for screw mounting on cable trays
 Colour: grey
 Halogen-free

Article number:	➔ AT2252
EAN:	8712259161532
Packaging quantity:	50
Price group:	250

Dimensions / Form

Product length:	120 mm
Product width:	95 mm
Product depth:	40 mm

Connections / Entries

Number of entries:	10
For conduit $\varnothing$:	16 mm

Assembly / Installation

Fastening type (other):	Screw latches
-------------------------	---------------

Safety / Properties

Halogen-free:	Yes
---------------	-----

Material / Colour


Colour designation:	Light grey
---------------------	------------

Approvals / Certifications

VDE:	Yes
------	-----

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
--------------------------------	--------

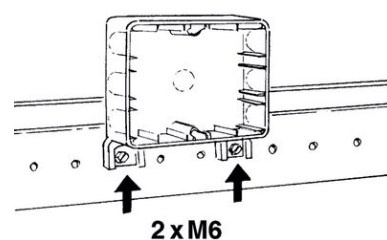

Product datasheet:

Maximum operating temperature:

70 °C

Cable-mate® is the innovative, award-winning cable box system that excels in terms of time savings and ease of installation. There is a wide selection of versatile cover material that can be attached to the cable box easily, without screws. The completely renovated raceway click attachment system makes rapid installation possible on all common raceways.