

## Product datasheet:

# Junction box AK2-IP65 M20 with base

### Cable-mate® cableboxes for dry indoor use

- Metric input M20.
- Bottom with mounting bosses for fastening DIN rails, among other things.
- Matching AK2 front part can be ordered separately.
- Increased protection class
- Suitable for mounting on cable support systems by means of separate accessories



|                        |                 |
|------------------------|-----------------|
| <b>Article number:</b> | <b>➔ AT2292</b> |
| EAN:                   | 8712259057477   |
| Packaging quantity:    | 50              |
| Price group:           | 250             |

#### Dimensions / Form

|                 |        |
|-----------------|--------|
| Product length: | 120 mm |
| Product width:  | 95 mm  |
| Product depth:  | 45 mm  |

#### Connections / Entries

|                    |       |
|--------------------|-------|
| Number of entries: | 8     |
| For conduit Ø:     | 19 mm |

#### Safety / Properties

|               |     |
|---------------|-----|
| Halogen-free: | Yes |
|---------------|-----|

#### Material / Colour


|                     |            |
|---------------------|------------|
| Colour designation: | Light grey |
|---------------------|------------|

#### Approvals / Certifications

|                   |      |
|-------------------|------|
| Protection class: | IP65 |
| VDE:              | Yes  |

#### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 70 °C  |

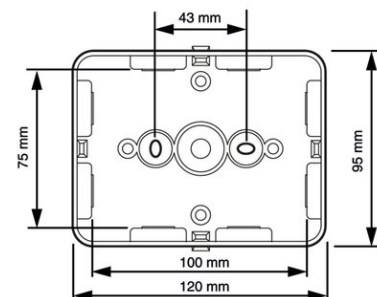

Cable-mate® is the innovative, award-winning cable box system that excels in terms of time savings and ease of installation. There is a wide selection of versatile cover material that can be attached to the cable box easily, without screws. The completely renovated raceway click attachment system makes rapid installation possible on all common raceways.