


Product datasheet:

UHW50-CLT BW / RD CLT-junction box, fire-resistant, smoke-resistant

Flush-mounted boxes for solid wooden walls

- Fire resistance tested in a standard metal stud wall.
- Suitable for solid wooden walls.
- Also applicable in hollow walls with a minimum plate thickness of 30 mm.
- Rock-solid mounting in wooden walls, thanks to unique wedge construction.

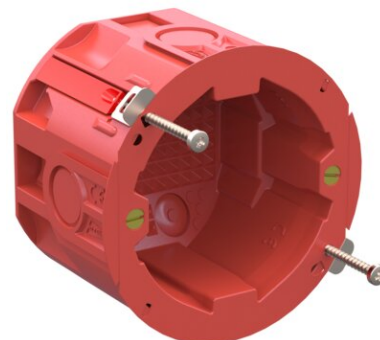

Article number: **↗ AT1497**

EAN: 8712259573670

Packaging quantity: 25

Dimensions / Form

Installation opening (wall/ceiling) Ø: 76 mm



Connections / Entries

Number of entries: 2

Assembly / Installation

Assembly type: UP (solid construction)



Certificates

Safety / Properties

Halogen-free: Yes

Special application: Fire protection

ETIM Product classification:

Box/housing for built-in mounting in the wall/ceiling

Mounting method: Other

Shape: Round

Construction type: Device connection box (round/square)

Model: Single

Provided with revolving ring: No

Couplable: No

Equipped with: None

Diameter: 76 mm

Length:

Width:

Depth:

Inner depth: 50 mm

Suitable for wall/board thickness:

Suitable for number of device inserts: 1

Product datasheet:

Mounting switching equipment:	Screwing
With screws:	No
Number of non-adjustable device fixing lugs:	
Number of adjustable device fixing lugs:	
Housing feed-through by break-out opening:	No
Housing feed-through by seal membrane:	No
Housing feed-through by nozzle:	No
Housing feed-through by step membrane:	No
Suitable for tube diameter:	
Suitable for cable diameter:	6 - 10 mm
Pipe locking:	
Pipe locking optional:	No
Inlet from the rear:	No
Number of inlets:	2
Number of included spouts:	0
Material:	Plastic
Halogen free:	No
Surface protection:	Untreated
Colour:	Red
Degree of protection (IP):	IP20
Degree of protection (NEMA):	
Cover model:	None
Transparent cover:	No
Cover attachment:	
Sealable:	No
Circuit integrity:	E60
With screening:	No
Airtight:	No
Max. conductor cross section:	6 mm ²
Number of poles of the clamp:	
Clamp position fixed:	No
Luminaire hook mounting:	No
Nozzle:	None
Special application:	Fire protection
With partition panel:	
Compliant with BS 4662:	

Securing flush-mounted box in wood? You can mount the CLT flush-mounted boxes from Attema firmly in solid and semi-solid walls. With the CLT flush-mounted boxes from Attema, there is now a suitable solution for mounting switchgear in solid walls. The clamping feet of the standard UHW50 boxes have been replaced by an innovative wedge construction.

Product datasheet:

- Install a flush-mounted box in a wooden wall.
- Rock-solid mounting in wooden walls, thanks to unique wedge construction.
- Directly screwed in a pre-milled hole of Ø 76 mm.
- Attachment with PZ1 screw.
- Also suitable for mounting in semi-solid walls with a panel thickness of 30 mm or more, such as OSB or gypsum fiber panels.
- In addition to the Standard edition, also available in: Fire-resistant, Fire-resistant and smoke-tight, Perilex.