

Progress® cable glands with split sealing inserts for patch and Ethernet cables.

For feedthroughs of cables with pre-assembled connectors.





Progress® cable glands with split sealing inserts.



3D animation

Cable glands with split sealing inserts facilitate feedthroughs of pre-assembled cables. Thanks to their easy installation and high ingress protection rating (IP54 and IP68), they provide reliable protection against dust and water in demanding environments. The product range includes sizes from M20 to M40 and thus covers a wide and diverse variety of applications.

Preservation of the cable supplier's guarantee

The use of this cable gland enables the warranties of suppliers of cables with pre-assembled connectors to be maintained.

Anti-twist protection

The longitudinal surface profiling in the lower part ensures a high degree of anti-twist protection for the sealing insert.

Pre-assembled cables with connectors

The sealing inserts facilitate the problem-free feedthrough of cables with pre-assembled connectors, for diameters of 15 to 28 mm. There is no need to remove and reattach the connectors, saving time and reducing the risk of damage.

Easy installation

The installation of our cable glands is particularly user-friendly and saves time and effort since connectors do not need to be reattached.

Wide range of applications



These cable glands are suitable for use in a wide range of industries, including telecommunications, industrial automation, renewable energy and more.



The advantages at a glance.

- Easy and time-saving installation
- High ingress protection rating (IP54 and IP68)
- Available in plastic and brass
- Connection threads M20 – M40
- Cable diameters from 3 to 8 mm
- Feedthroughs for cables with connectors of diameter 15 to 28 mm

- M20 max. 15mm Ø
- M25 max. 17mm Ø
- M32 max. 25mm Ø
- M40 max. 28mm Ø



G	>Ø< min mm	>Ø< max mm	ØPL mm	mm	H mm	L mm	Art.-No.	
M20x1.5	3.0	4.5	15	24	21	6	1000.20.045G	50
M20x1.5	4.5	6.5	15	24	21	6	1000.20.065G	50
M20x1.5	6.0	8.0	15	24	21	6	1000.20.080G	50
M25x1.5	3.0	4.5	17	30	25	7	1000.25.045G	25
M25x1.5	4.5	6.5	17	30	25	7	1000.25.065G	25
M25x1.5	6.0	8.0	17	30	25	7	1000.25.080G	25
M32x1.5	3.0	4.5	25	36	28	8	1000.32.045G	25
M32x1.5	4.5	6.5	25	36	28	8	1000.32.065G	25
M32x1.5	6.0	8.0	25	36	28	8	1000.32.080G	25
M40x1.5	4.5	6.5	28	46	31	8	1000.40.065G	10
M40x1.5	6.0	8.0	28	46	31	8	1000.40.080G	10



G	>Ø< min mm	>Ø< max mm	ØPL mm	mm	H mm	L mm	Art.-No.	
M20x1.5	3.0	4.5	15	24	21	10	1100.20.045G	50
M20x1.5	4.5	6.5	15	24	21	10	1100.20.065G	50
M20x1.5	6.0	8.0	15	24	21	10	1100.20.080G	50
M25x1.5	3.0	4.5	17	30	25	11	1100.25.045G	25
M25x1.5	4.5	6.5	17	30	25	11	1100.25.065G	25
M25x1.5	6.0	8.0	17	30	25	11	1100.25.080G	25
M32x1.5	3.0	4.5	25	36	28	13	1100.32.045G	25
M32x1.5	4.5	6.5	25	36	28	13	1100.32.065G	25
M32x1.5	6.0	8.0	25	36	28	13	1100.32.080G	25
M40x1.5	4.5	6.5	28	46	31	13	1100.40.065G	10
M40x1.5	6.0	8.0	28	46	31	13	1100.40.080G	10

G	>Ø< min mm	>Ø< max mm	ØPL mm	mm	H mm	L mm	Art.-No.	
M20x1.5	3.0	4.5	15	27	28	13	1571.20.045G	50
M20x1.5	4.5	6.5	15	27	28	13	1571.20.065G	50
M20x1.5	6.0	8.0	15	27	28	13	1571.20.080G	50
M25x1.5	3.0	4.5	17	34	33	13	1571.25.045G	25
M25x1.5	4.5	6.5	17	34	33	13	1571.25.065G	25
M25x1.5	6.0	8.0	17	34	33	13	1571.25.080G	25
M32x1.5	3.0	4.5	25	41	35	15	1571.32.045G	25
M32x1.5	4.5	6.5	25	41	35	15	1571.32.065G	25
M32x1.5	6.0	8.0	25	41	35	15	1571.32.080G	25
M40x1.5	4.5	6.5	28	50	40	15	1571.40.065G	10
M40x1.5	6.0	8.0	28	50	40	15	1571.40.080G	10



Systems and solutions for professional cable entries.




Progress® EMC.

EMC cable glands. Wide product range for trouble-free installation.



Cable glands.

Progress® und Syntec® cable glands.
The best for cables.

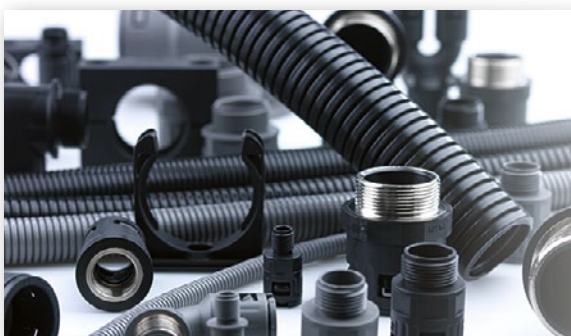

Cable protection conduits.

Products for applications in the manufacturing of machines, plant, vehicles and rolling stock and in the automation and energy technology sectors.

Technical information and advice

Further information about our products, system solutions and communication media may be found on our website at **www.agro.ch**.

Our team of technical advisors will be happy to answer any questions you may have or provide further information, and looks forward to speaking with you: **+41 (0)62 889 47 47**

