
Product datasheet:

# KG40 Coupler cream (RAL 1013)

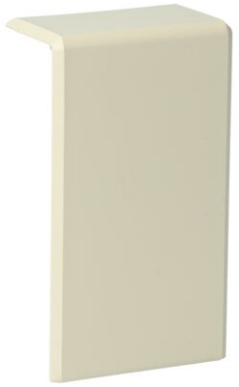

## K40 Skirting Trunking System

· For skirting duct cover.
· Overlap with skirting duct is 5 mm. It is unnecessary to cut the skirting duct cover perfectly square at exactly the right length.
· Attachment to trunking base via click connection.

| **Article number:** | **AT9164** |
|---|---|
| EAN: | 8712259012346 |
| Packaging quantity: | 50 |

### ETIM Product classification:
### Coupler for plinth skirting duct

| | |
|---|---|
| Height: | |
| Depth: | |
| Sealing lip cover: | None |
| Material: | Plastic |
| Material quality: | |
| Halogen free: | No |
| Colour: | White |
| RAL-number: | 1.013 |
| Decoration: | None |
| Degree of protection (IP): | |
| Impact strength: | |

**Assembly instructions**

The K40 Skirting Trunking System has a modern design and includes extremely compact switching devices that lend themselves to the installation of complete surface-mount systems for 230V, low-voltage and data cabling. K40 is easy to mount and install. Thanks to the symmetric cover strip, vertical applications are also possible. It is simple to expand and offers the flexibility of combination with the K25/P25 Trunking system. It can also be seamlessly integrated with existing systems. The system is extremely well suited for renovation and changing user requirements. The switching devices can easily be moved. The usable storage area for the wiring remains optimal.

· The K40 system complies with EN 50085-1 and EN 50085-2-1.
· K40 is suitable for installations 16A/250V~.
· Protection class: IP40 (EN 60529).
· Impact resistance: IK07 (EN 50102).
· Minimum temperature for storage and transport: 5 °C.
· Minimum temperature during installation and use: 5 °C.
· Maximum operating temperature: + 60 °C.
· Compartment 1: cross section 350 mm²; maximum number of cables: 2x Ø 10 mm or 1x Ø 13 mm.
· Compartment 2: cross section 640 mm²; maximum number of cables: 3x Ø 10 mm or 2x Ø 13 mm.