
Product datasheet:

FW40 Flat corner cream (RAL 1013)


K40 Skirting Trunking System

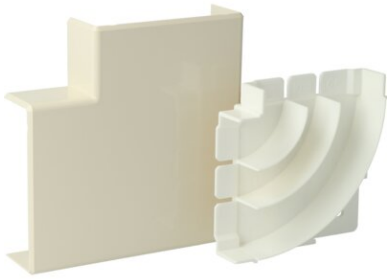

· Including basic plate for continuous divider walls.
· Skirting duct can be sawn off at a right angle.
· Radius protection R=25 mm for data cables in the outermost two corner compartments.
· Attachment of cap via click connection.
· Overlap with skirting duct is 10 mm. It is unnecessary to cut the skirting duct cover perfectly square at exactly the right length.

Article number:	**AT9291**
EAN:	8712259254777
Packaging quantity:	25

ETIM Product classification:
Flat bend for skirting duct



Height baseboard duct:	70 mm
Depth plinth skirting duct:	24 mm
Sealing lip cover:	None
Material:	Plastic
Material quality:	
Halogen free:	No
Colour:	White
RAL-number:	1.013
Decoration:	None
Model:	Base unit and cover
With protective foil:	No
With carpet border:	No
Degree of protection (IP):	
Impact strength:	

Assembly instructions

The K40 Skirting Trunking System has a modern design and includes extremely compact switching devices that lend themselves to the installation of complete surface-mount systems for 230V, low-voltage and data cabling. K40 is easy to mount and install. Thanks to the symmetric cover strip, vertical applications are also possible. It is simple to expand and offers the flexibility of combination with the K25/P25 Trunking system. It can also be seamlessly integrated with existing systems. The system is extremely well suited for renovation and changing user requirements. The switching devices can easily be moved. The usable storage area for the wiring remains optimal.

· The K40 system complies with EN 50085-1 and EN 50085-2-1.
· K40 is suitable for installations 16A/250V~.
· Protection class: IP40 (EN 60529).
· Impact resistance: IK07 (EN 50102).
· Minimum temperature for storage and transport: 5 °C.
· Minimum temperature during installation and use: 5 °C.
· Maximum operating temperature: + 60 °C.
· Compartment 1: cross section 350 mm²; maximum number of cables: 2x Ø 10 mm or

1x Ø 13 mm.
· Compartment 2: cross section 640 mm²; maximum number of cables: 3x Ø 10 mm or 2x Ø 13 mm.