

Product datasheet:

BK1619 Universal junction box

Splice junction boxes Universal

- Provided with 8 combination breakout ports (16 and 19 mm).
- Pipe click resistant to strong wire pulling.
- Quick fastening possible by thumbnail-clamping plug (art. no. AT9118).



Article number: **AT1619**

EAN: 8712259167817

Packaging quantity: 100

Connections / Entries

Number of entries: 8

For conduit Ø: 19 mm

Safety / Properties

Halogen-free: Yes

ETIM Product classification:

Box/housing for surface mounting on the wall/ceiling

Model:

Equipped with: None

Max. conductor cross section: 6 mm²

Number of poles:

Number of clamp positions per pole:

Shape: Rectangular

Mounting method: Wall-/ceiling mounting

Mounting in the soil: No

Mounting under water: No

Suitable for tube diameter: 16/19 mm

Number of inlets: 8

Inlet from the rear: No

Length: 138 mm

Width: 70 mm

Depth: 46 mm

Diameter:


Number of cable glands included:

Connectable: No

Type of housing feed-through: Preembossing

With strain relief:

Material: Plastic

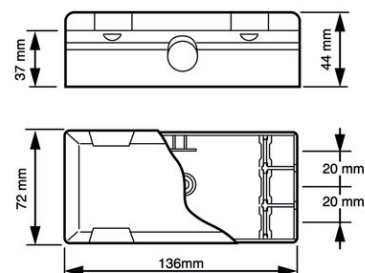

Product datasheet:

Halogen free:	No
Surface protection:	Untreated
Colour:	White
RAL-number (similar):	
Degree of protection (IP):	IP40
Degree of protection (NEMA):	
Cover model:	None
Outgoing connections with connectors for plug-in building installation:	
Transparent cover:	No
Castable:	No
Cover attachment:	Snapped on
Casting compound included:	No
Sealable:	No
Rated insulation voltage Ui:	500 V
Circuit integrity:	None
With screening:	No
Weatherproof:	No
Working temperature:	-40 - 70 °C
Explosion-tested version:	No
Suitable for Ex-zone gas:	None
Suitable for Ex-zone dust:	None

The universal splice junction boxes, types BK16/19 and type LU, with an extensive selection of components, each form a complete system. Both systems include covers with simplex and duplex outlets, with and without an integrated cover. The BK16/19 system also includes a large series of pre-assembled covers with adapters.