

## Product datasheet:

# Cable glands Progress® nickel-plated brass for installation of multiple cables

## Short entry thread metric

- One-piece sealing insert
- not overall length insulated
- Further versions and entry threads are available upon request.
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



|                        |                      |
|------------------------|----------------------|
| <b>Article number:</b> | <b>1310.20.2.075</b> |
| E-No:                  | 121161528            |
| EAN:                   | 7611614139555        |
| Packaging quantity:    | 50                   |

### Dimensions / Form

|                  |         |
|------------------|---------|
| Thread:          | M20x1.5 |
| Spanner size:    | 24 mm   |
| Dimension H:     | 23 mm   |
| Thread length L: | 6 mm    |

### Connections / Entries

|                      |                        |
|----------------------|------------------------|
| Min. clamping range: | 5.5 mm                 |
| Max. clamping range: | 7.5 mm                 |
| clamp technology:    | Compression technology |

### Features


|                |        |
|----------------|--------|
| Thread type:   | metric |
| Thread length: | short  |

### Approvals / Certifications

|                   |      |
|-------------------|------|
| Protection class: | IP68 |
| VDE:              | Yes  |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 100 °C |

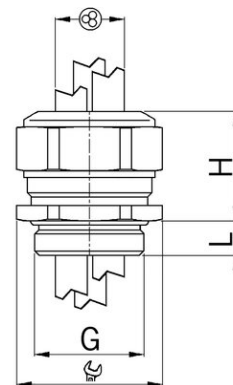

Assembly instructions



Certificates



Planning data