

Product datasheet:

Cable glands Progress® nickel-plated brass for installation of multiple cables

Short entry thread metric

- One-piece sealing insert
- not overall length insulated
- Further versions and entry threads are available upon request.
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number:  **1310.20.4.060**

EAN: 7611614139609

Packaging quantity: 50

Price group: 540

Dimensions / Form

Thread: M20x1.5

Spanner size: 24 mm

Dimension H: 23 mm

Thread length L: 6 mm

Connections / Entries

Min. clamping range: 4.5 mm

Max. clamping range: 6 mm

clamp technology: Compression technology

Features

Thread type: metric

Thread length: short

Approvals / Certifications


Protection class: IP68

VDE: Yes

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 100 °C

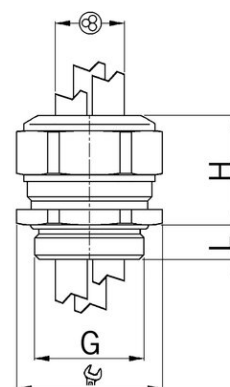

Assembly instructions



Certificates



Planning data